




ETD-5M1 Two Stage Thermostat

HL3 wiring instructions

24 VAC is supplied from an internal 40 VA transformer. **DO NOT** supply 24 V to the terminal strip.


ETD-5M1

24/125 VAC

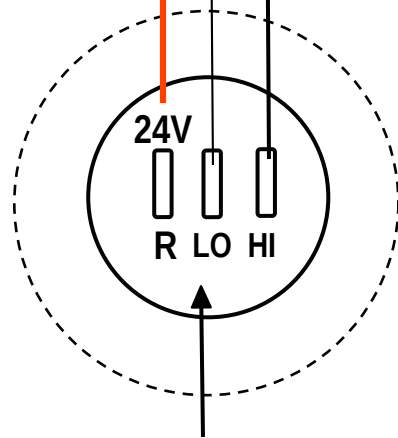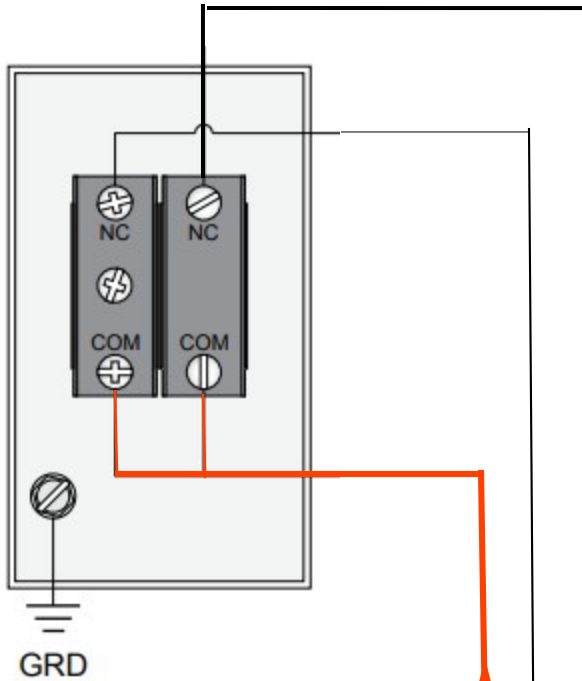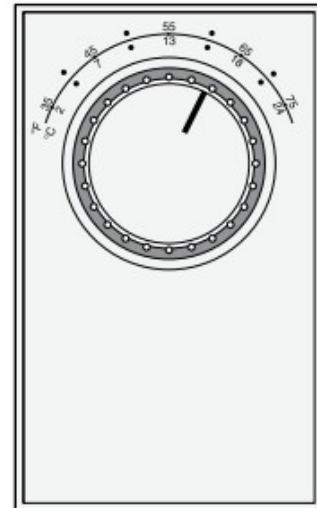

¼" terminals

R: 24 VAC Power out
LO: Low fire
HI: High fire

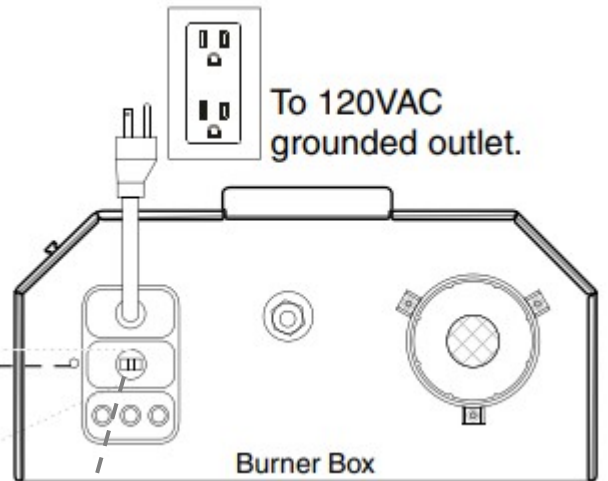

To 120VAC grounded outlet.

Burner Box

HL3 Two Stage Heater



Note: If optional yellow control cord "OD Kit" is installed then the following wire colors apply:

24VAC out = Green
Low = White
High = Black

