

TH-BR22 Programmable Thermostat

DX3L wiring instructions



Specifications

Range: 45°F to 90°F (7°C to 32°C)

Differential: Adjustable temperature differential (0.5°, 1°, or 2°)

Operation: Single or two stage operation


Electrical Rating: 24 VAC (18–30 VAC)

1 amp maximum load per terminal


4 amp total maximum load (all terminals)

Dimensions: 4.25"(108 mm) x 5.12"(130 mm) x 1"(25 mm)

Additional Features: Bright blue backlight, hardwire or battery powered, installer lock mode, and SpeedSet programming mode

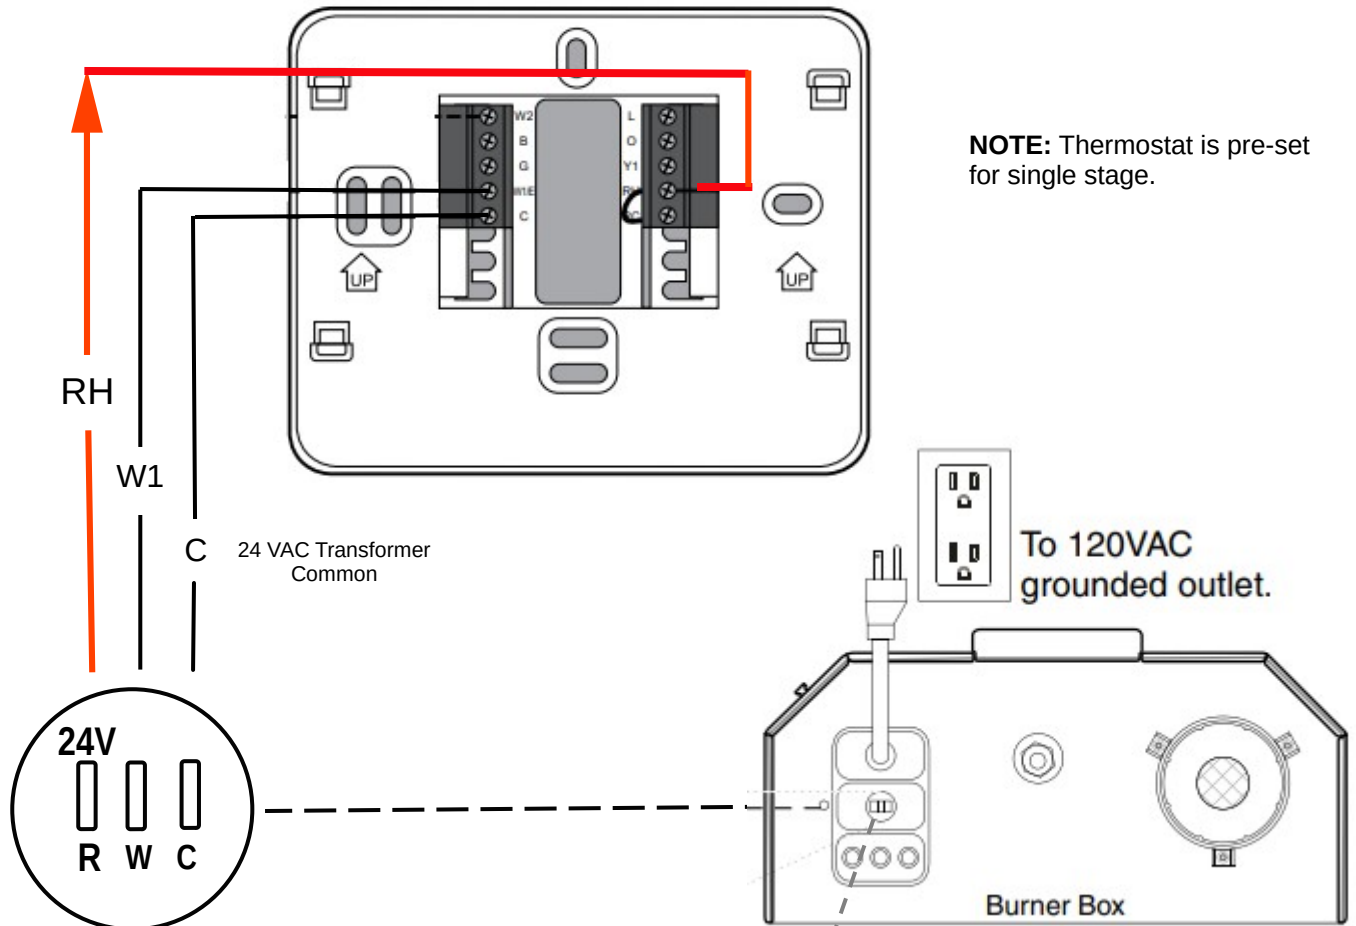

NOTE: Thermostat is pre-set for single stage.

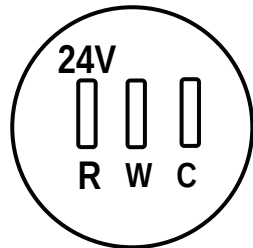

1/4" terminals

R: 24 VAC Power out

W: Call for Heat

C: Common for 24VAC Power

DX3L Single Stage Heater

Note: If optional yellow control cord "OD Kit" is installed then the following wire colors apply:

24VAC out = Black

W (call for heat) = White

C (common) = Green

